

POWER GAME TO WIN UPS

POWER
OUT??...

GAME ON



WITH A

GAME UPS

FROM UPSONIC

AUTO RESTART ON AC RESTORATION

To keep you Gaming for longer

ALL NEW POWER SCREEN

So you can check your load and battery management while gaming

ONE BUTTON START UP

Back up power

PROTECTS YOUR DSL ROUTER AND TELEPHONE LINE WHILST GAMING

UPSONIC FAMOUS 3 YEAR WARRANTY

2 YEARS ON BATTERY

**POWER FOR THE
NON-STOP WORLD**

www.upsonic.com.au

Phone 1800 634 307




UPSONIC POWER

Specifications

Model	DOMESTIC SERIES			
		G 1000	G 1400	G 2000
CAPACITY	VA/W	1000VA/600W	1400VA/840W	2000VA/1080W
INPUT	Voltage	230VAC		
	Voltage Range	180 - 280VAC		
	Frequency	43 - 65Hz (Auto Sensing)		
OUTPUT	Voltage	230VAC		
	Voltage Regulation (Batt Mode)	±5%		
	Frequency	50 Hz		
	Frequency Regulation (Batt Mode)	±1Hz		
	Output Waveform	Modified Waveform		
BATTERY	Battery Type	12V/7AHx2pcs	12V/9AHx2pcs	
	Recharge Time	8 Hours to 90% after complete discharge		
TRANSFER TIME	Typical	<5ms		
INDICATOR	AC Mode	The bottom green LED illuminated.		
		The 2nd to 5th green LED's indicating Load		
	Battery / Backup Mode	The bottom green LED		
		The 2nd to 5th green LED's indicating battery capacity		
	Fault	Red LED @top illuminated		
AUDIBLE ALARM	Backup / Backup Mode	Sounding every 10 seconds		
	Battery Low	Sounding every second		
	Overload	Sounding every 0.5 seconds		
	Fault	Continuously Sounding		
PROTECTION	Full Protection	Discharge, Overcharge and Overload protection		
PHYSICAL	Dimension (DxWxH) (mm)	405x150x205		
WEIGHT	Nett Weight	13.8kgs	14.2kgs	16kgs
ENVIRONMENT	Operating Environment	0-40° C, 0-90% Relative Humidity (non-condensing)		
	Noise level	AC Mode Less than 40dB		
		Backup Mode Less than 45dB		
INTERFACE	Smart RS-232 / USB	Support Windows 95/98/NT/2000/XP/Apple Mac, Novell and Linux		

System Block Diagram

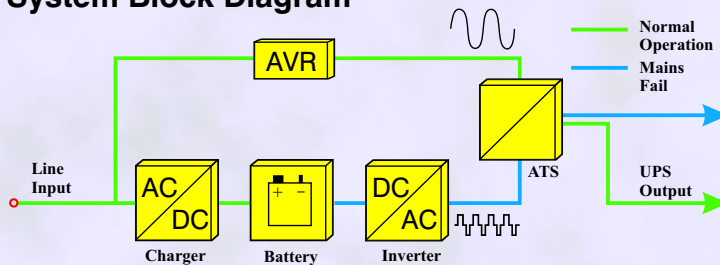

GAME UPS Autonomy Estimates (In minutes)

Typical Equipment	Multimedia PC	Small Server	Standard Office or POS Workstations	
			x 1	x 2
G 1000	24	20	28	14
G 1400	42	40	46	28
G 2000	42	40	46	28

For more accurate selections use the On-Line UPS Calculator located at www.upsonic.com.au/calc.asp or phone Upsonic Power for a free appraisal.

GAME UPS Connections

Smart RS232 Comms / USB	✓	1
UPS Outlets	✓	
With Australian 3 pin adaptor		
GAME UPS 1000 - 2000 - Breaker	✓	4 IEC
Telephone/Modem/Network	✓	1

Upsonic Power Pty Ltd

ABN 51 070 890 390
National Sales 1800 634 307
National Fax 1800 634 308

Melbourne
9 Nicole Way
Dandenong South, Vic 3175

Telephone: (03) 9706 0045
Facsimile: (03) 9706 8003

www.upsonic.com.au
Phone 1800 634 307



**POWER FOR THE
NON-STOP WORLD**